
Microduct - Unitube cables

This unitube cable is used in the Access, Distribution, City Network and FTTx applications; it is designed to be easily installed designed for outdoor installation by blowing in microduct.

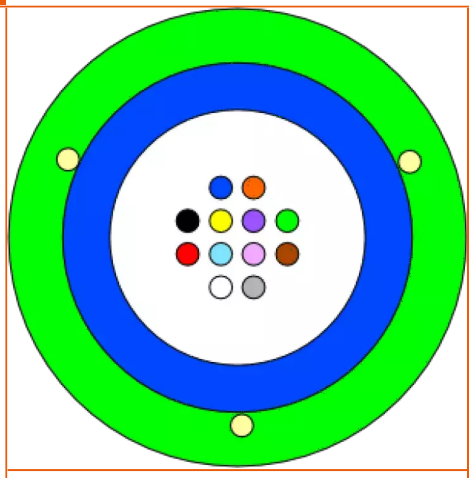

STANDARDS

EN 187000
IEC 60794

Characteristics & Applications

- High blowing distance due to the excellent friction properties of the outer sheath
- Right balance between flexibility and rigidity
- Aramid yarns reinforcement
- All dielectric design
- Waterproof structure

Fibre type

The cable is available with different fibre types.

Construction

- Jelly filled dual wall tube
- Aramid yarns
- Low coefficient of friction sheath

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Microduct - Unitube cables

CHARACTERISTICS

结构特性	
颜色	绿
光纤类型	SM
不含金属	Yes
结构类型	Unitube
尺寸特性	
管数	1
光纤数	12
机械特性	
耐挤压 (IEC 794-1-E3)	200 N/cm
使用特性	
存储温度范围	-40...70 °C
安装类型	户外 - 可吹缆的微管
Installation temperature, range	0...40 °C
敷设时弯曲系数	20 (xD)

销售和交付信息

Standard Marking

Aginode - FIBRE OPTIC CABLE - B-Lite SPxxxx - XXxYY - FB - TN - metric

XX = Fibre Count
YY = Fibre Type
FB = Frameries, Belgium (manufacturing place)
TN = Traceability Number

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Product list

	Aginode ref.	Country ref.	Name	颜色	光纤类型	光纤数	管数
	SP1089	-	Microcable 1x12SM SP1089 B-LITE	绿	SM	12	1
	SP1108	-	微型电缆 1x6SM SP1108 B-LITE	绿	SM	6	1
	SP1604	-	微型电缆 1x12SM SP1604 B-LITE	黑	SM	12	1
	10561406	-	微型电缆 1x4SM G657A1 SP1108 B-LITE	黑	SM (G657.A1)	4	1
	SP1707	-	微型电缆 1x12SM SP1707 B-LITE	黑	SM (G657.A1)	12	1
	SP1806	-	Microcable 1x12SM SP1806 B-LITE	黑	SM	12	1
	14500878	-	Microcable 1x4 G657A1 SP1707 B-LITE (N)	绿	SM (G657.A1)	4	1
	SP2015	-	Microcable 1x24SM 200µm SP2015	黑	G657A1 - 200 µm	24	1
	Microcable 1X24 G657A1 SP2060 B-LITE	-	微型电缆 1x24 G657A1 SP2060 B-Lite	黑	SM (G657.A1)	24	1

= Make to order, = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.