

LANmark-OF 室内微束分支 MU 光缆 LSZH GB31247-B1

适用于室内安装使用

- 每个子单元12芯，大于12芯采用多个子单元绞合结构
- 250微米纤芯，易于熔接
- 无填充油膏，全干式结构
- 光纤芯数：12~144芯
- 单模OS2 G.657.A1、OM3、OM4光缆均采用抗弯曲光纤
- 光缆采用LSZH护套，符合GB31247-B1 (d0 t0 a1) 阻燃等级，为标准适用范围内的最高等级

说明与应用

安捷诺 LANmark-OF 室内微束分支MU光缆专为室内应用而设计。该光缆每个子单元12芯，大于12芯采用多个子单元绞合结构，每个子单元包含独立的芳纶抗拉元件，可从主缆剥离独立敷设及熔接，特别适用于室内多芯数分支熔接使用场景。


结构

截面图附有图例：

1. LSZH外护套
2. 芳纶纱
3. 包带
4. 中心加强芯
5. 12芯子单元
6. 芳纶纱
7. 撕裂绳

特点

- 光缆采用LSZH护套，符合GB31247-B1 (d0 t0 a1)阻燃等级，是该标准适用范围内最高等级
- 专为室内多芯数分支熔接设计
- 多子单元绞合结构
- 中心加强芯
- 可选多模和单模光纤
- 支持12~72芯光纤

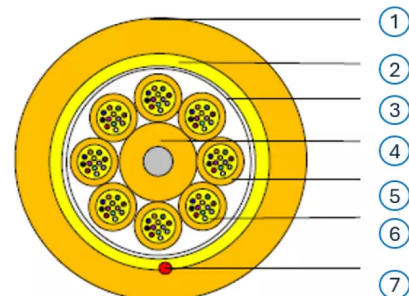

STANDARDS

ISO/IEC 11801
ANSI/TIA-568.3-D
GB 31247

LANmark-OF 室内微束分支 MU 光缆 LSZH GB31247-B1

CHARACTERISTICS

结构特性

外护套	LSZH
-----	------

机械特性

抗冲击性能(IEC 60794-1-E4)	3次冲击/ N.M
耐压(IEC 60794-1-E3)	1000 N/100mm

使用特性

存储温度范围	-20...60 °C
操作温度, 范围	-20...60 °C
环境安装温度, 范围	0...40 °C

Product list

Aginode ref.	Country ref.	Name
N175.12MUGB1	-	LANmark-OF 室内12芯微束分支MU型光缆 LSZH GB31247-B1, 多模OM3 50/125
N175.24MUGB1	-	LANmark-OF 室内24芯微束分支MU型光缆 LSZH GB31247-B1, 多模 OM3 50/125
N175.48MUGB1	-	LANmark-OF 室内48芯微束分支MU型光缆 LSZH GB31247-B1, 多模 OM3 50/125
N175.72MUGB1	-	LANmark-OF 室内72芯微束分支MU型光缆 LSZH GB31247-B1, 多模 OM3 50/125
N175.96MUGB1	-	LANmark-OF 室内96芯微束分支MU型光缆 LSZH GB31247-B1, 多模 OM3 50/125
N175.144MUGB1	-	LANmark-OF 室内144芯微束分支MU型光缆 LSZH GB31247-B1, 多模 OM3 50/125
N177.12MUGB1	-	LANmark-OF 室内12芯微束分支MU型光缆 LSZH GB31247-B1, 多模OM4 50/125
N177.24MUGB1	-	LANmark-OF 室内24芯微束分支MU型光缆 LSZH GB31247-B1, 多模 OM4 50/125
N177.48MUGB1	-	LANmark-OF 室内48芯微束分支MU型光缆 LSZH GB31247-B1, 多模 OM4 50/125
N177.72MUGB1	-	LANmark-OF 室内72芯微束分支MU型光缆 LSZH GB31247-B1, 多模 OM4 50/125
N177.96MUGB1	-	LANmark-OF 室内96芯微束分支MU型光缆 LSZH GB31247-B1, 多模 OM4 50/125
N177.144MUGB1	-	LANmark-OF 室内144芯微束分支MU型光缆 LSZH GB31247-B1, 多模 OM4 50/125
N174.12MUGB1	-	LANmark-OF 室内12芯微束分支MU型光缆 LSZH GB31247-B1, 单模OS2 G.652.D 9/125
N174.24MUGB1	-	LANmark-OF 室内24芯微束分支MU型光缆 LSZH GB31247-B1, 单模OS2 G.652.D 9/125
N174.48MUGB1	-	LANmark-OF 室内48芯微束分支MU型光缆 LSZH GB31247-B1, 单模OS2 G.652.D 9/125
N174.72MUGB1	-	LANmark-OF 室内72芯微束分支MU型光缆 LSZH GB31247-B1, 单模OS2 G.652.D 9/125
N174.96MUGB1	-	LANmark-OF 室内96芯微束分支MU型光缆 LSZH GB31247-B1, 单模OS2 G.652.D 9/125
N174.144MUGB1	-	LANmark-OF 室内144芯微束分支MU型光缆 LSZH GB31247-B1, 单模OS2 G.652.D 9/125
N17A.12MUGB1	-	LANmark-OF 室内12芯微束分支MU型光缆 LSZH GB31247-B1, 单模OS2 G.657.A1 9/125
N17A.24MUGB1	-	LANmark-OF 室内24芯微束分支MU型光缆 LSZH GB31247-B1, 单模OS2 G.657.A1 9/125
N17A.48MUGB1	-	LANmark-OF 室内48芯微束分支MU型光缆 LSZH GB31247-B1, 单模OS2 G.657.A1 9/125
N17A.72MUGB1	-	LANmark-OF 室内72芯微束分支MU型光缆 LSZH GB31247-B1, 单模OS2 G.657.A1 9/125
N17A.96MUGB1	-	LANmark-OF 室内96芯微束分支MU型光缆 LSZH GB31247-B1, 单模OS2 G.657.A1 9/125
N17A.144MUGB1	-	LANmark-OF 室内144芯微束分支MU型光缆 LSZH GB31247-B1, 单模OS2 G.657.A1 9/125

☎ = Make to order, 📦 = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.