

Cat.6A 550 F/FTP LSZH Dca

AGINODE C6A 550 F/FTP LSZH DCA 4P 100M IVOIRY

Aginode Ref: 10270261

- Complies to latest Cat 6A standard version
- Supports Class EA applications
- Cable tested up to 550 MHz
- Flame retardant according to EN50575:2014+A1:2016 and IEC 60332-1
- Individual foiled pairs with global screen for EMC performance
- Compatible POE, POE+ and UPOE
- RoHS EC Directive compliant
- Compliant with European Reach regulation



Application

F/FTP Category 6A cables are the high end offering from Aginode. Manufactured in accordance with ISO IEC 61156-5 requirements, the F/FTP cable is the best choice to support all Class EA applications like Ethernet, Fast Ethernet, Gigabit Ethernet, 10 Gigabit Ethernet, ... The Cat 6A F/FTP cables are suitable for voice, data, CATV and sharing application installations up to 500 MHz. Aginode Cat.6A cables, combined with a similar class of performance connectivity, are suitable for voice and data installations according to ISO/IEC 11801, EN 50173 and TIA/EIA 568 standards.

Construction

1. Conductor: solid bare copper
2. Insulation : Polyethylen (EN 50290-2-23)- Two insulated conductors twisted to a pair
3. Screen: ALU/PET foil on each pair. Alu outside - 4/2 laid up together
4. Tinned copper drain wire
5. Screen: ALU/PET foil - Alu inside
6. Outer Jacket : LSZH (EN 50290-2-27)

Environment

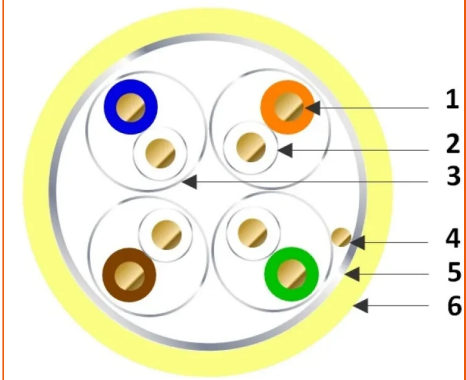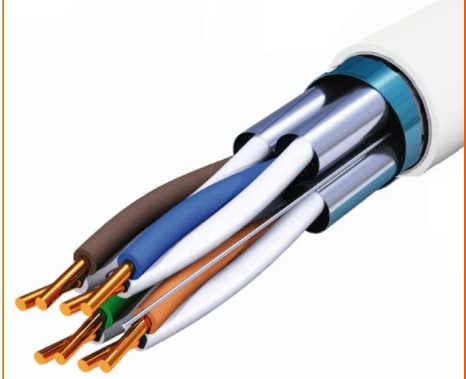

STANDARDS

EN 50173
EN 50288
IEC 60332-1
IEC 61156-5
ISO/IEC 11801

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Designed to reduce the environment impact, Aginode cables are compliant with RoHS 2011/65 Directive and European Reach 1907/2006/EC regulation. The outer sheat of the cabel is made of halogen free material (IEC 60754-1 / EN 50267-2-1), whith limited fumes emission (IEC 61034-1/2 / EN 50268-1/2) and no acid gaz emission in case of fire (IEC 60754-2 / EN 50267-2-2).

Aginode measure the environmental impact of each of the cable. Upon request the PEP Ecopassport or the Eco Material Declaration could be available.

Cat 6A 550 F-FTP TRANSMISSION CHARACTERISTICS

CAT.6A 550 F/FTP TRANSMISSION CHARACTERISTICS

Values at 20°C

Frequency (MHz)	S/T	4	16	20	31.25	62.5	100	155	200	240	250	350	500	550
Attenuation max. (dB/100m)	Standard	3.8	7.5	8.4	10.5	15.0	19.1	24.1	27.6	31.1	34.3	37.2	45.3	-
	Typical	3.6	7.2	8.0	10.0	14.2	18.1	22.7	25.8	29.0	31.9	34.6	41.8	43.9
NEXT min. (dB)	Standard	75.0	75.0	75.0	72.9	68.4	65.3	62.4	60.8	59.6	59.3	57.1	54.8	-
	Typical	100.0	100.0	100.0	100.0	100.0	97.4	94.5	92.9	91.7	91.4	89.2	86.9	86.3
PSNEXT min. (dB)	Standard	75.0	74.2	72.8	69.9	65.4	62.3	59.4	57.8	56.6	56.3	54.1	51.8	-
	Typical	100.0	100.0	100.0	100.0	97.5	94.4	91.5	89.9	88.7	88.4	86.2	83.9	83.3
ACRF min. (dB)	Standard	66.0	53.9	52.0	48.1	42.1	38.0	34.2	32.0	30.4	30.0	27.1	24.0	-
	Typical	91.2	89.4	89.0	88.0	85.9	84.0	81.7	80.1	78.5	75.7	75.7	72.1	71.0
PSACRF min. (dB)	Standard	63.0	50.9	49.0	45.1	39.1	35.0	31.2	29.0	27.4	27.0	24.1	21.0	-
	Typical	88.2	86.4	86.0	85.0	82.9	81.0	78.7	77.1	75.8	75.5	72.7	69.1	68.0
Return Loss min. (dB)	Standard	23.0	25.0	25.0	23.6	21.5	20.1	18.8	18.0	17.4	17.3	17.3	17.3	-
	Typical	28.0	30.0	30.0	28.6	26.5	25.1	23.8	23.0	22.4	22.3	22.3	22.3	22.3

According to standard Cat.6A IEC61156-5, except for NEXT & PSNEXT: from 4 to 500Mhz, performances + 20dB and for ACRF & PSACRF, performances + 10dB

AGINODE C6A 550 F/FTP LSZH Dca 4P 100m IVOIRY

Characteristics

结构特性

外护套	低烟无卤
护套颜色	象牙白
无卤	是
Higher heating value	550 MJ/km
电缆类型	F/FTP
线对屏蔽	Aluminium / Polyester tape
总屏蔽	Aluminium/polyester tape

尺寸特性

近似重量	48 kg/km
线对数	4
导体横截面尺寸 (AWG)	23
绝缘外径	1.31 mm
标称外径	7.0 mm
外部尺寸	Not applicable

电气特性

互电容	42 nF/km
20°C时导体的最大直流电阻	75 Ohm/km
特性阻抗在100Mhz	100 Ohm

机械特性

最大安装拉力	80 N
--------	------

传输特性

传播速度	82 %
耦合衰减在30MHz	>70 dB

使用特性

应用类型	固定安装
类型	Cat. 6A
阻燃 - 火焰	IEC 60332-1

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

烟密度	低
包装	Coil 100 m
环境安装温度, 范围	0...50 °C
敷设时弯曲系数	8 (xD)
安装时弯曲系数	4 (xD)
环境静态工作温度, 范围	-20...70 °C

业绩声明

AGINODE C6A 550 F/FTP LSZH Dca 4P 100m IVOIRY pdf — 116.14 KB [下载](#) ↓