

Cat.6 450 F/UTP LSZH Dca

AGINODE C6 450 F/UTP LSZH DCA 4P 1000M IVOIRY

Aginode Ref: 10272115

EAN: 3427630104286

- Complies to latest Cat 6 standard version
- Supports Class E applications
- Cable tested up to 450 MHz
- Flame retardant according to EN50575:2014+A1:2016 and IEC 60332-1
- Global screen for EMC performance
- Compatible POE, POE+ and UPOE
- RoHS EC Directive compliant
- Compliant with European Reach regulation
- N'Roll and MOBIWAY™ compatible

Application


F/UTP Category 6 cables are the standard offering from Aginode. Manufactured in accordance with ISO IEC 61156-5 requirements, the F/UTP cable is the best choice to support all Class E applications like Ethernet, Fast Ethernet, Gigabit Ethernet, ... Cat 6 F/UTP cables are suitable for basic voice and data installations up to 250 MHz. Aginode Cat.6 cables, combined with a similar class of performance connectivity, are suitable for voice and data installations according to ISO/IEC 11801, EN 50173 and TIA/EIA 568 standards.

Construction

1. Conductor: solid bare copper
2. Insulation : Polyethylen (EN 50290-2-23) - Two insulated conductors twisted to a pair
3. Cross filler - 4/2 laid up together
4. Tinned copper drain wire
5. Screen: ALU/PET foil - Alu inside
6. Outer Jacket : LSZH - Dca

Environment

Designed to reduce the environment impact, Aginode cables are compliant with RoHS 2011/65 Directive and European Reach 1907/2006/EC regulation. The outer sheath of the cable is made of halogen free material (IEC 60754-1 / EN 50267-2-1),

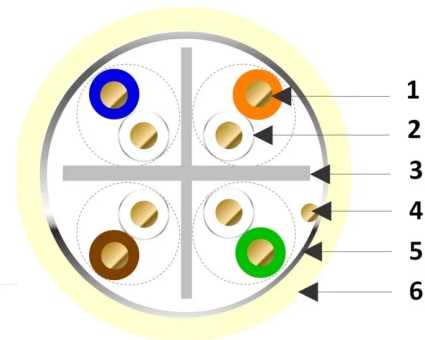

STANDARDS

EN 50173
EN 50288
EN 50575
IEC 60332-1
IEC 61156-5
ISO/IEC 11801

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

with limited fumes emission (IEC 61034-1/2 / EN 50268-1/2) and no acid gas emission in case of fire (IEC 60754-2 / EN 50267-2-2).

Aginode measure the environmental impact of each of the cable. Upon request the PEP Ecopassport or the Eco Material Declaration could be available.

Cat 6 450 F-UTP TRANSMISSION CHARACTERISTICS

CAT.6 450 F/UTP TRANSMISSION CHARACTERISTICS

Values at 20°C

Frequency (MHz)	S/T	4	10	16	20	100	200	250	350	450
Attenuation max. (dB/100m)	Standard	3.8	6.0	7.6	8.5	19.9	29.1	33.0	-	-
	Typical	3.6	5.5	6.9	7.7	17.6	25.4	28.6	34.4	39.5
NEXT min. (dB)	Standard	66.3	60.3	57.2	55.8	45.3	40.8	39.3	-	-
	Typical	80.5	72.7	68.8	66.9	53.3	47.4	45.5	42.7	40.5
PSNEXT min. (dB)	Standard	63.3	57.3	54.2	52.8	42.3	37.8	36.3	-	-
	Typical	77.5	69.7	65.8	63.9	50.3	44.4	42.5	39.7	37.5
ACRF min. (dB)	Standard	56.0	48.0	43.9	42.0	28.0	22.0	20.0	-	-
	Typical	85.5	76.3	71.5	69.3	53.1	46.1	43.9	40.5	38.0
PSACRF min. (dB)	Standard	53.0	45.0	40.9	39.0	25.0	19.0	17.0	-	-
	Typical	82.5	73.3	68.5	66.3	50.1	43.1	40.9	37.5	35.0
Return Loss min. (dB)	Standard	23.0	25.0	25.0	25.0	20.1	18.0	17.3	-	-
	Typical	27.0	29.0	29.0	29.0	24.5	22.5	21.9	20.9	20.2

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

AGINODE C6 450 F/UTP LSZH Dca 4P 1000m IVOIRY

Characteristics

结构特性

外护套	低烟无卤
护套颜色	象牙白
无卤	是
Higher heating value	821 MJ/km
电缆类型	F/UTP
总屏蔽	Aluminium/polyester tape

尺寸特性

近似重量	49 kg/km
线对数	4
导体横截面尺寸 (AWG)	24
绝缘外径	1.13 mm
标称外径	7.1 mm
外部尺寸	Not applicable

电气特性

互电容	50 nF/km
20°C时导体的最大直流电阻	95 Ohm/km
特性阻抗在100Mhz	100 Ohm

机械特性

最大安装拉力	80 N
--------	------

传输特性

传播速度	70 %
耦合衰减在30MHz	>50dB

使用特性

应用类型	固定安装
类型	Cat. 6
阻燃 - 火焰	IEC 60332-1
烟密度	低

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

包装	Drum 1000 m
环境安装温度, 范围	0...50 °C
敷设时弯曲系数	8 (xD)
安装时弯曲系数	4 (xD)
环境静态工作温度, 范围	-20...70 °C

业绩声明

AGINODE C6 450 F/UTP LSZH Dca 4P 1000m IVOIRY pdf — 116.34 KB [下载](#) ↓