

LANmark-OF Loose Tube Universal 6 -12 and 24FO - Cca

LANMARK-OF LOOSE TUBE UNIVERSAL 12XSINGLEMODE 9/125 OS2 LSZH CCA YELLOW

Aginode Ref: N164.LTUN12-YC

- Loose Tube Universal optical fibre cable with High Level of transmission : OS2
- High fire behavior : reaction to fire Cca according to EN50575:2014+A1:2016
- Indoor/Outdoor cable
- Designed for splicing with pigtails


The new 12FO OS2 Loose Tube technology from Aginode is specifically engineered for indoor building & outdoor where installations where both high performance and fire safety are essential. Designed with a loose tube construction, it offers good protection for fibers against mechanical stresses and environmental factors.

- **CPR (Cca, s2, d1, a1)**: Low fire propagation, reduced smoke emission, minimal toxic gas release.
- **Loose Tube Gel-Filled Design**: Excellent protection against mechanical stress, water ingress, and temperature variations.
- **Vertical installations with loop reserve** for simplified maintenance and future upgrades.
- **Indoor & Outdoor Application**: Ideal for structured cabling in residential, commercial, and public buildings, as well as outdoor environments.
- **High Performance OS2**: Reliable, high-speed data transmission over long distances.
- **Flexible and Robust**: Easy to install in ducts, conduits, and technical spaces.
- **UV-Resistant & Waterproof**: Designed to withstand outdoor conditions when required.

The central tube contains 12 fibers well identified to make installation easy and simple.

Applications :

- Building backbone networks
- Data centers
- Outdoor duct installations

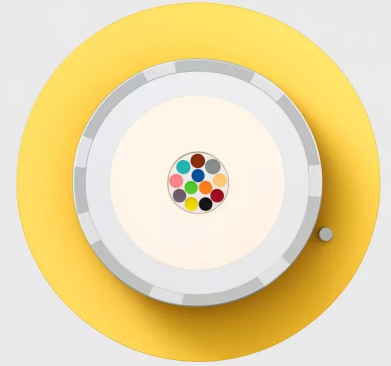

STANDARDS

ISO/IEC 11801

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LANmark-OF Loose Tube Universal 12xSinglemode 9/125 OS2 LSZH Cca Yellow

Characteristics

结构特性

| | |
|------------|-----------------------------------|
| 结构类型 | 松套管 |
| 光纤类型 | SM (G657.A1) |
| 无卤 | IEC 60754-1 |
| 护套材料 | LSZH Halogen free flame retardant |
| 长度水密封性所用材料 | Swellable Glass yarns |

尺寸特性

| | |
|------|----------|
| 近似重量 | 71 kg/km |
| 标称外径 | 7.6 mm |
| 光纤数 | 12 |
| 管数 | 1 |
| 管径 | 2.3 mm |

机械特性

| | |
|------------------------|--------------|
| 耐压(IEC 60794-1-E3) | 1500 N/100mm |
| 最大拉力(IEC 60794-1-2-E1) | 2000 N |
| 抗拉强度 | 2000 N |

使用特性

| | |
|---------------------------------|---------------|
| 阻燃 | IEC 60332-3 |
| 阻燃 - 火焰 | IEC 60332-1-2 |
| 气体腐蚀性 | 低 IEC 60754-2 |
| Installation temperature, range | -30...60 °C |
| 最小弯曲半径 - 动态 | 152 mm |
| 最小弯曲半径 - 静态 | 114 mm |
| 操作温度, 范围 | -40...70 °C |
| 烟密度 | IEC 61034-2 |
| 存储温度范围 | -40...70 °C |

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

DoP: Declaration of Performance

DOP_LANmark-OF Loose Tube Universal 12xSinglemode 9/125 OS2 LSZH Cca Yellow.pdf pdf — 59.19 KB 下载 ↓