

风管 - 松套管电缆

LOOSE TUBE CABLE 6X12SM SP1976

Aginode Ref: Loose Tube Cable 6x12SM SP1976


This cable is used for Access, Distribution, City Network and FTTx applications. It is designed to be installed by pulling or blowing in ducts.

Characteristics & Applications

- High blowing distance due to the excellent friction properties of the outer sheath
- Central strength member reinforcement
- All dielectric design
- Waterproof dry core structure

Construction

- Jelly filled tubes containing coloured fibres
- Central FRP strength member
- Low friction outer sheath

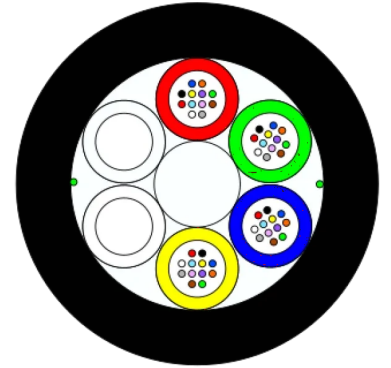

STANDARDS

EN 187000
IEC 60794

Loose Tube Cable 6x12SM SP1976

Characteristics

结构特性

光纤类型	SM
铠装类型	非铠装
外护套	HDPE
不含金属	Yes
加强构件	FRP
结构类型	松套管

尺寸特性

管数	6
近似重量	78 kg/km
光纤数	72
标称外径	10.2 mm

机械特性

允许牵引负载	400 daN
耐挤压 (IEC 794-1-E3)	200 N/cm

使用特性

防啮齿保护	无
操作温度, 范围	-20...70 °C
存储温度范围	-30...60 °C
安装类型	户外 - 管道
环境安装温度, 范围	-5...50 °C
敷设时弯曲系数	20 (xD)

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.