

# Optical Transition Box

## OPTICAL TRANSITION BOX - OTB 192

**Aginode Ref:** 13200853


**EAN:** 3444360279169

- OTB 192-4Cable IAC Optical transition Box
- 316L stainless steel cabinet
- Designed for harsh and marine environments, Sigmadur520 CoatingRAL 7001
- 2 Optical module96OF with combined splicing and patching functions integrated in the cabinet Specific IP66 devices for breakout and submarine cables

The Optical Transition Box allows to connect wind turbines together. Hybrid cables (power and fibre) are used and terminated in this box which is located at the base of the wind turbines. It is designed in 316L stainless steel material due to its installation in Wind Farm. Its protection degrees IP66 and IK10 are compatible for a use in harsh environment. The product allows to connect several breakout cables and submarine hybrid cables. It is equipped with 2 COSH optical module96OF which combines splicing and patching functions (up to 192 LC/UPC adaptors and 192 splices).

The incoming submarine cables are spliced to pigtails, ready for splicing in cassettes, which are connected on the back of the patch panel. Incoming cables can be also spliced directly to the outgoing submarine cable going to another cabinet. Each cable entry for submarine cable is equipped with a BAEP fan-out and clamping device. The box has also cable entries compatible for 12OF breakout cables terminated with LC/UPC adapters which are plugged to the patch panel. The IP66 watertightness is guaranteed thanks to the specific ROXTEC cable glands and seals for breakout or hybrid cables.

Individual grounding for submarine cables are available and linked to the grounding system of the cabinet ensuring an electrical continuity between all components. The box is secured by 2 key locks and can be mounted easily thanks to its 4 fixing points outside the product.

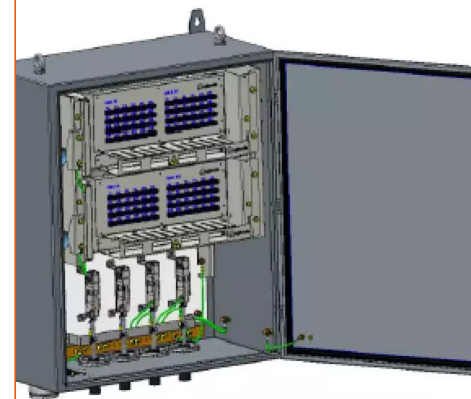

### STANDARDS

Aginode specification

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

The product is delivered in wood box (NIMP15) and fully equipped with adaptors and pigtails, mounted and tested, ready for termination.

Compliant with ISO 9001, ISO 14001 and OHSAS 18001.

# Optical Transition Box - OTB 192

## Characteristics

### 结构特性

盒式	熔接和跳接
颜色	Grey ral 7001
材料	Stainless steel 316L

### 尺寸特性

深度	300 mm
高度	700 mm
最大安装卡座数量	2 x 5
最大的适配器数	2 x 96
接头数量	2 x 120
重量	48000 g
宽度	600 mm

### 机械特性

IK Rating	10
-----------	----

### 使用特性

适配器	LC/UPC DUPLEX
应用类型	过渡
安装类型	户外
中跨距	No
最小弯曲半径 - 工作	30 mm
包装	Cardboard box
RoHS compliant	Yes
防水	IP66

## Notice OTB 192

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Exemplar - 4802914  
Data - 26/07/2024



NOTICE / INSTRUCTIONS



**OTB 96-192**

Optical Terminal Box

[www.aginode.net](http://www.aginode.net)



PDF - 1.6 MB  
Notice OTB 192  
下载 ↓

*All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.*